


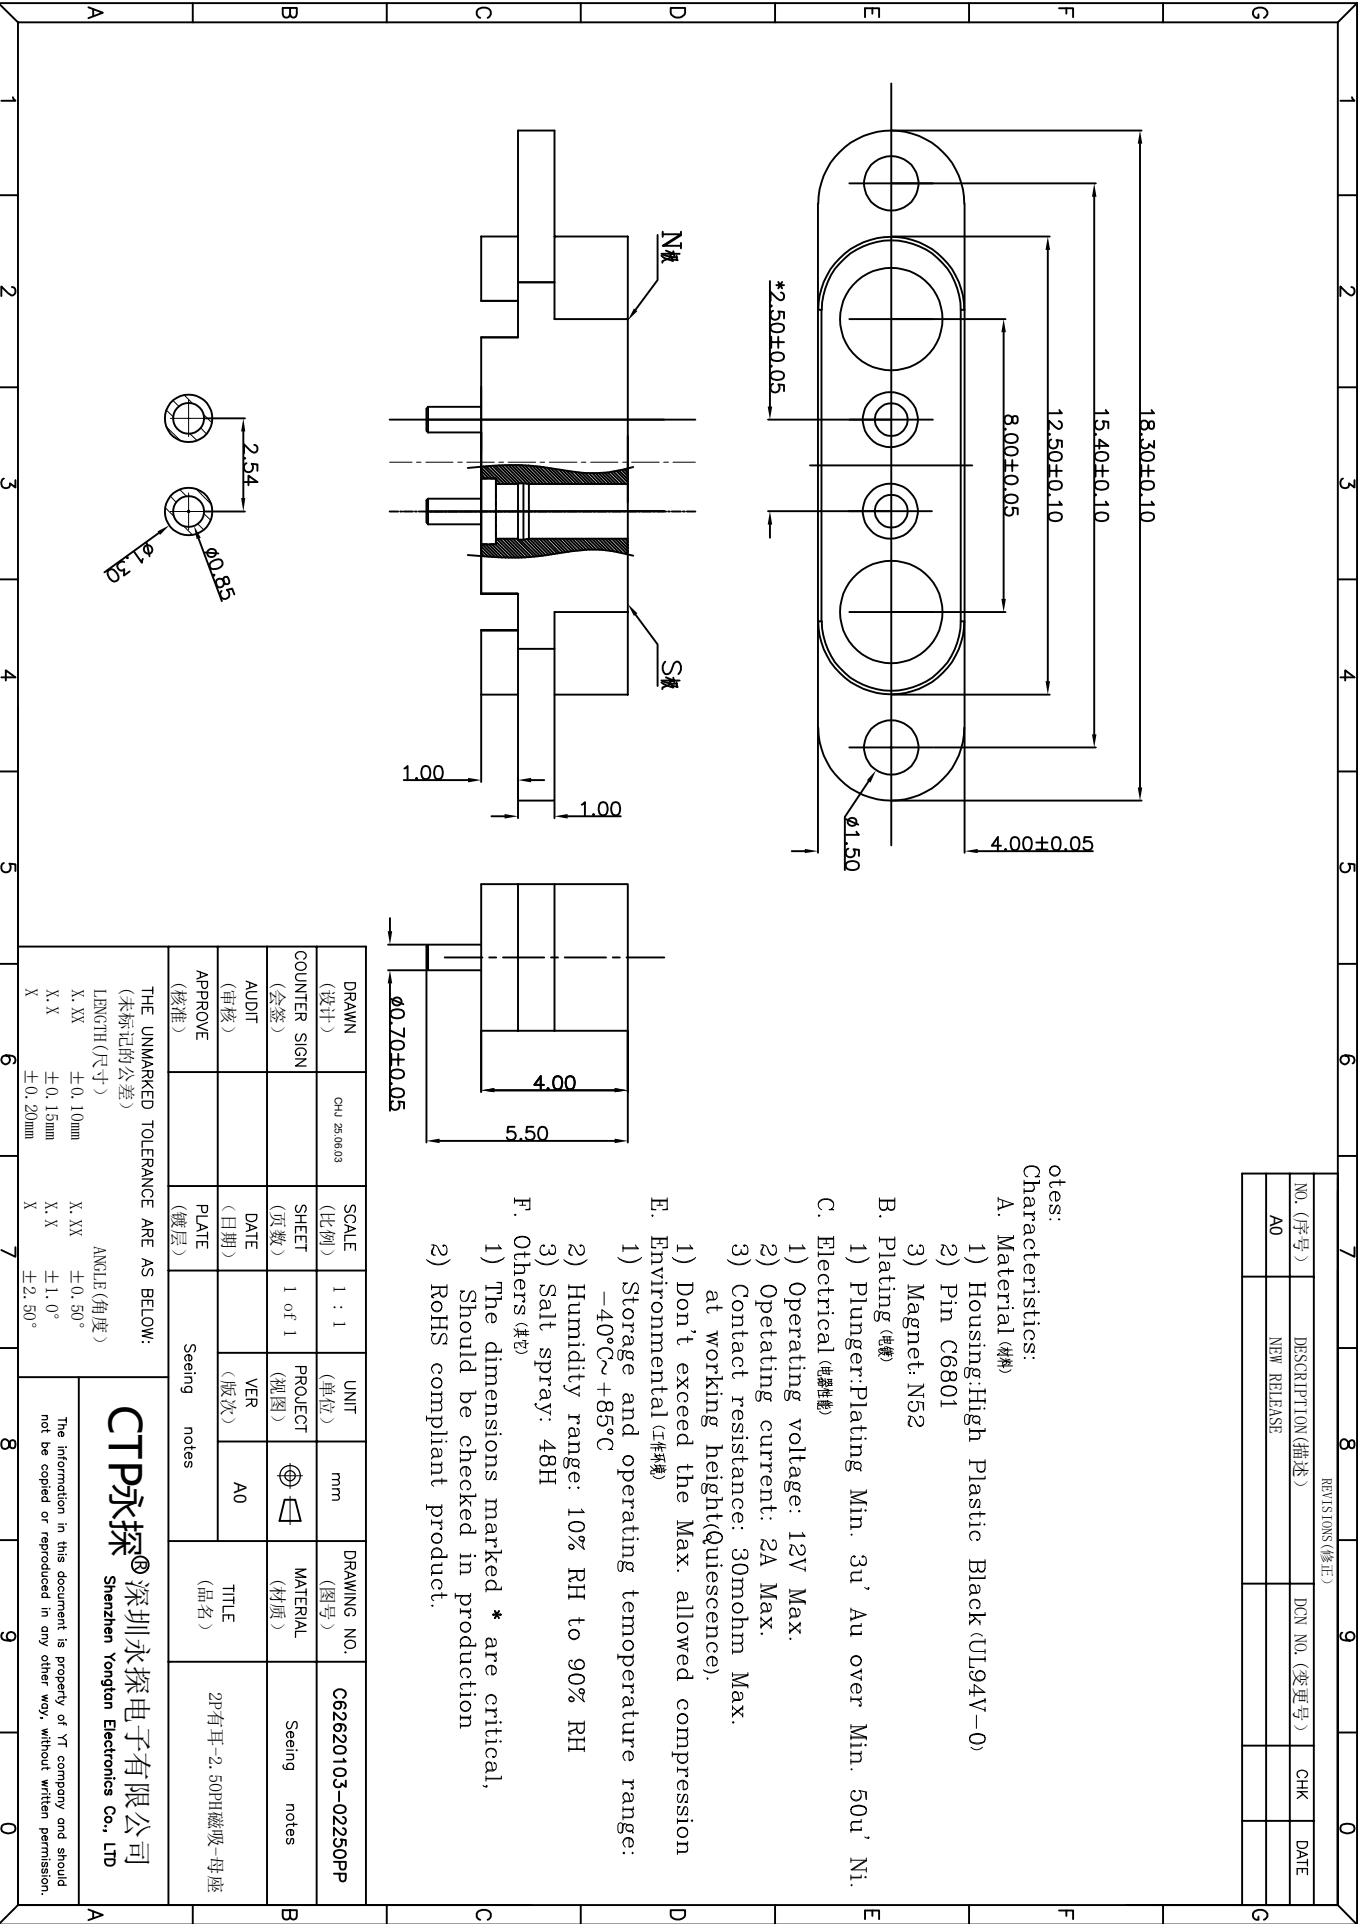

otes:
Characteristics:

A. Material (材料)

- 1) Housing: High Plastic Black (UL94V-0)
- 2) Pin C6801
- 3) Magnet: N52

B. Plating (电镀)

- 1) Plunger: Plating Min. 3u' Au over Min. 50u' Ni.

C. Electrical (电器性能)

- 1) Operating voltage: 12V Max.
- 2) Operating current: 2A Max.
- 3) Contact resistance: 30mohm Max. at working height (quiescence).

E. Environmental (环境)

- 1) Don't exceed the Max. allowed compression
- 1) Storage and operating temperature range: -40°C~+85°C
- 2) Humidity range: 10% RH to 90% RH
- 3) Salt spray: 48H

F. Others (其他)

- 1) The dimensions marked * are critical, Should be checked in production
- 2) RoHS compliant product.

DRAWN (设计)	CHJ 25.06.03	SCALE (比例)	1 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	C62620103-02250PP
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes
AUDIT (审核)		DATE (日期)		VER (版本)	A0	TITLE (品名) 2P有耳-2.50PH磁吸-母座	
APPROVE (核准)		PLATE (镀层)	Seeing notes				
THE UNMARKED TOLERANCE ARE AS BELOW: (未标记的公差)							
LENGTH(尺寸)				ANGLE(角度)			
X.XX ±0.10mm				X.XX ±0.50°			
X.X ±0.15mm				X.X ±1.0°			
X ±0.20mm				X ±2.50°			
The information in this document is property of YT company and should not be copied or reproduced in any other way, without written permission.							

CTP永探® 深圳永探电子有限公司
Shenzhen Yongton Electronics Co., LTD

The information in this document is property of YT company, and should not be copied or reproduced in any other way, without written permission.