

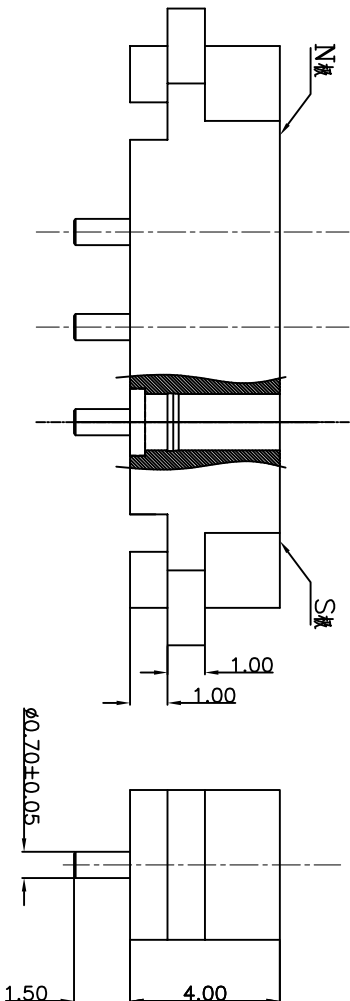


REVISIONS (修正)				
NO. (序号)	DESCRIPTION (描述)	DCN NO. (变更号)	CHK	DATE
A0	NEW RELEASE			

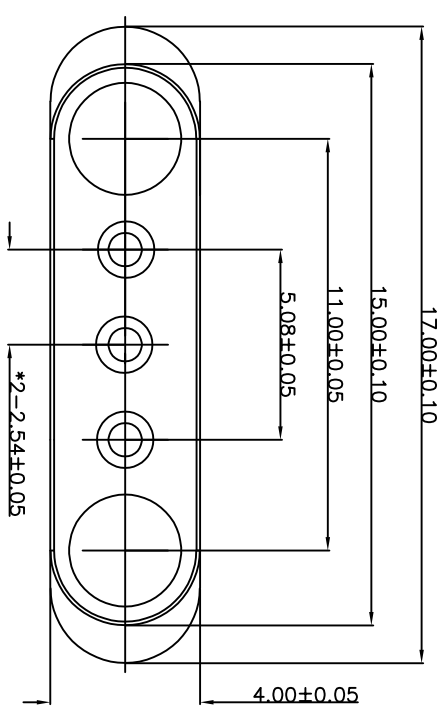

otes:
Characteristics:

A. Material (材料)

- 1) Housing: High Plastic Black (UL94V-0)
- 2) Pin C6801
- 3) Magnet: N52

B. Plating (电镀)

- 1) Plunger: Plating Min. 3u' Au over Min. 50u' Ni.

C. Electrical (电气性能)

- 1) Operating voltage: 12V Max.
- 2) Operating current: 2A Max.
- 3) Contact resistance: 30mohm Max. at working height (Quiescence).

E. Environmental (环境条件)

- 1) Don't exceed the Max. allowed compression
- Storage and operating temperature range: -40°C~+85°C
- 2) Humidity range: 10% RH to 90% RH
- 3) Salt spray: 48H

F. Others (其它)

- 1) The dimensions marked * are critical, Should be checked in production
- 2) RoHS compliant product.

DRAWN (设计)	CHJ 25.06.06	SCALE (比例)	1 : 1	UNIT (单位)	mm	DRAWING NO. (图号)	C62490103-03250PP
COUNTER SIGN (会签)		SHEET (页数)	1 of 1	PROJECT (视图)		MATERIAL (材质)	Seeing notes
AUDIT (审核)		DATE (日期)		VER (版本)	A0	TITLE (品名)	3P无耳-2.54PH磁吸-母座
APPROVE (核准)		PLATE (镀层)		Seeing notes			

THE UNMARKED TOLERANCE ARE AS BELOW:
(未标记的公差)

LENGTH (尺寸)		ANGLE (角度)	
X. XX	±0.10mm	X. XX	±0.50°
X. X	±0.15mm	X. X	±1.0°
X	±0.20mm	X	±2.50°

CTP永探® 深圳永探电子有限公司
Shenzhen Yongtan Electronics Co., LTD

The information in this document is property of YT company and should not be copied or reproduced in any other way, without written permission.