
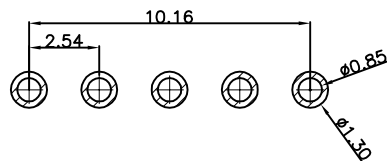
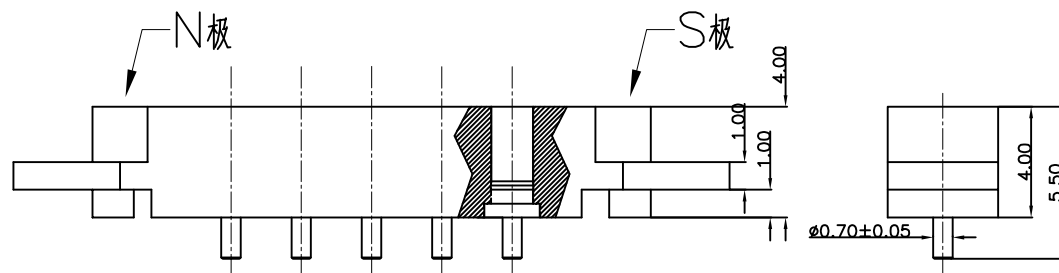


客户图

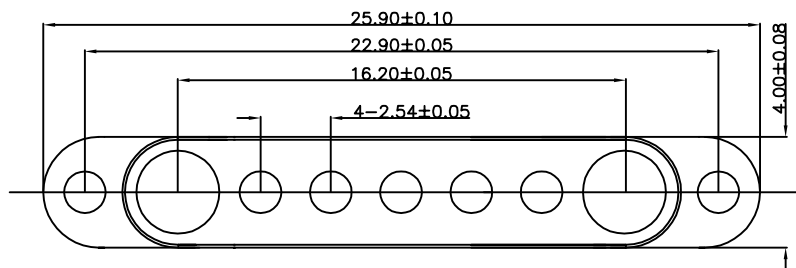

otes:

Characteristics:

A. Material (材料)

- 1) Housing: High Plastic Black (UL94V-0)
- 2) Pin C6801
- 3) Magnet: N52

B. Plating (电镀)

- 1) Plunger: Plating Min. 3u' Au over Min. 50u' Ni.

C. Electrical (电器性能)

- 1) Operating voltage: 12V Max.
- 2) Operating current: 2A Max.
- 3) Contact resistance: 30mohm Max. at working height (Quiescence).

- 1) Don't exceed the Max. allowed compression

E. Environmental (工作环境)

- 1) Storage and operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 2) Humidity range: 10% RH to 90% RH
- 3) Salt spray: 48H

F. Others (其它)

- 1) The dimensions marked * are critical, Should be checked in production
- 2) RoHS compliant product.



深圳永探电子有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.X ±0.10 X.XX ±0.05 X.XXX ANG. ±2°	APPROVED BY	DATE	TITLE		
	CHECKED BY	DATE	5P带耳-2.54PH磁吸-母座		
	DRAWN BY	DATE	DOCUMENT NO	PAGE	
	CXS	2024.11.19	DN011-003	1	
SER	DESCRIPTION	CHK	DATE	UNIT	SIZE
				mm	A4
			PART NO	REV	SHEET
			*	A1	1/1
			SCALE		
			1:1		