客户图

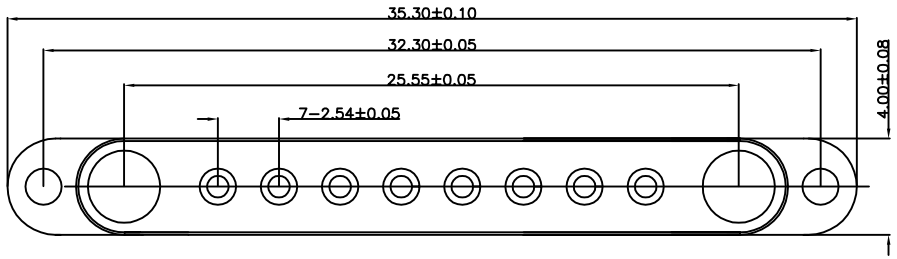

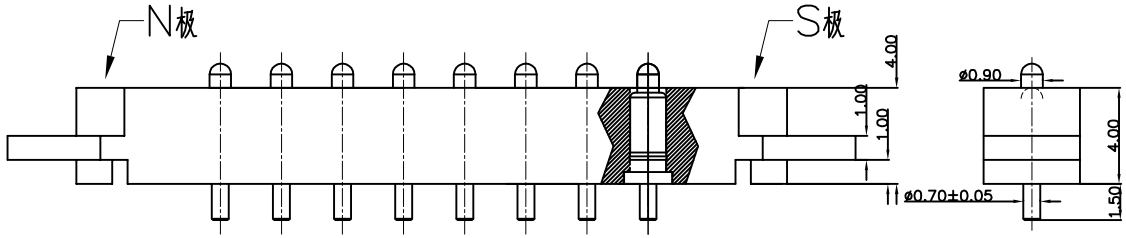

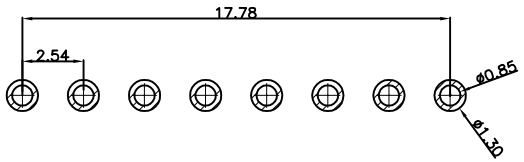

otes:

Characteristics:

A. Material (材料)
   1) Housing:High Plastic Black (UL94V-0)
   2) Plunger:brass C6801
   3) Barrel:brass C6801

B. Plating (电镀)
   1) Plunger:Plating Min. 3u' Au over Min. 50u' Ni.

C. Electrical (电器性能)
   1) Operating voltage: 12V Max.
   2) Opetating current: 2A Max.
   3) Contact resistance: 30mohm Max. at working height(Quiescence).

   1) Spring Force:45gf±10gf at working height
   2) Mechanical life: 10,000 cycle min.
   3) Don't exceed the Max. allowed compression

E. Environmental (工作环境)
   1) Storage and operating temoperature range: -40°C~+85°C
   2) Humidity range: 10% RH to 90% RH
   3) Salt spray: 48H

F. Others (其它)
   1) The dimensions marked * are critical, Should be checked in production
   2) RoHS compliant product.

深圳永探电子有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.X ±0.10 X.XX ±0.05 X.XXX ANG. ±2°	APPROVED BY DATE	TITLE 8P带耳-2.54PH磁吸-公座	
	CHECKED BY DATE		
	DRAWN BY DATE CXS 2024.11.19	DOCUMENT NO DN011-003	PAGE 1
UNIT mm	SIZE A4	PART NO *	REV A1 / SHEET 1/1 / SCALE 1:1

SER	DESCRIPTION	CHK DATE